



Manual Test

Panel Relay **RXG**

Precise | 5 pins 12A / 8 pins 8A | Multiple base



RXG



(Copper-clad coil)
Enough quantity



(AgSnO₂ contacts)
Large capacity
1NO/1NC 12A
2NO/2NC 8A



(Pin)
Nickel-plated copper

Dual Display.

(Status light)
(Mechanical window)



(Identify the coil)

DC/Green AC/Orange





Manual Test Key.

Manual adjustment test key: it can instantly change the contact state to achieve the purpose of testing the circuit state.

(1: Instant test)

(2: Locked test)



Testing is possible without tools.

Not activated



Action



OEM / ODM
Customization

Multiple
Standards



*As per label. Certification Statement Statement

Multiple Bases.

Standard DIN35mm mounting

1.Plug-in base **Tool-free**

2.Cage-type base

3.Fence-type base

Surge suppression
and indicator light module



Product Information.

■ Product brand : **ENMG 恩默**

■ Product name : RXG high-power relay

■ Product functions : Light/Test key

■ Contact structure : 5 pins / 1NO/1NC 8 pins / 2NO/2NC

■ Switching capacity : 12A DC30V / AC250V 8A DC30V / AC250V

■ Contact capacity : 12A DC30V / AC250V 8A DC30V / AC250V

■ Power consumption : DC≈0.53W, AC≈0.9VA (Each circuit)

■ Rated voltage : DC: 12V, 24V, 48V, 100~110V
AC: 24V, 110V, 120V, 220V, 230V

■ Contact resistance : <50mΩ (Initial value)

■ Start-up time : <15ms

■ Release time : <10ms


■ Ambient temperature : -40°C ~ +70°C (No icing)

■ Ambient humidity : 5%RH ~ 85%RH (No condensation)

Select Specifications.

Model Description

The design of product models and ordering codes is intended to cover all possible specifications of this series of products, and they cannot be combined arbitrarily. If you have any questions during the first selection, please contact the technical service engineers for confirmation.

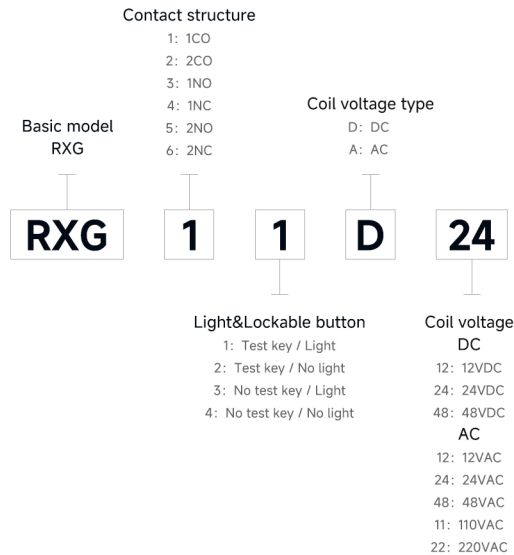

Selection Table

Relay Selection


Function type	Contact form	Coil voltage	Model
Test key/Light	1NO/1NC 12A	DC24V	RXG11D24
		AC220V	RXG11A22
	2NO/2NC 8A	DC24V	RXG21D24
		AC220V	RXG21A22

Base Selection

Relay model	Base model
RXG11D24 RXG11A22	Plug-in base (+Surge suppression module) RGZE05P
	Cage-type base (+Surge suppression module) RXGZE1S35M
	Plug-in base RG05P
	Fence-type base SJ1S-05B
RXG21D24 RXG21A22	Plug-in base (+Surge suppression module) RGZE08P
	Cage-type base (+Surge suppression module) RXGZE1S48M
	Plug-in base RG08P
	Fence-type base SJ2S-05B

Overall Dimension

*Unit: mm±0.5.The dimensions are measured manually,so there may be deviations. Please refer to the actual product.

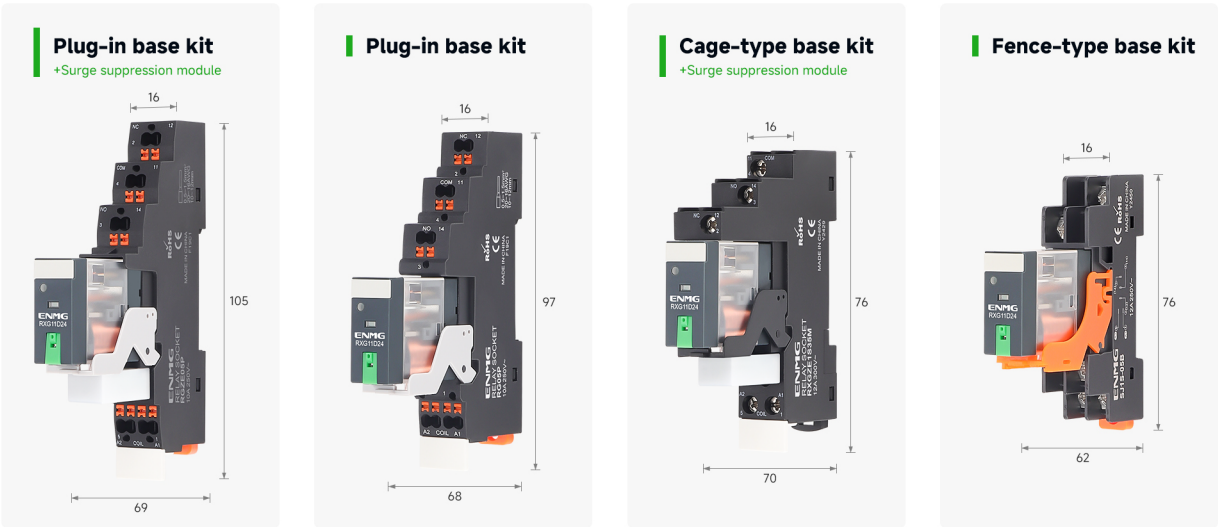

Internal Schematic Diagram.



Appearance Display.





Started in 2012, exploring the frontier, leading innovation, self-transformation, the world of ideas.

始于2012年，探索前沿、创新引领、自我蜕变、理念世界。

ENMG INTELLIGENT TECHNOLOGY

恩爵ENMG智能科技

Zhejiang ENMG Intelligent Technology Co., Ltd.

浙江恩爵智能科技有限公司

Wenzhou Yuanzhang Electric Co., Ltd.

温州元璋电气有限公司

公司地址 Address：浙江省乐清市柳市镇柳江路3788号


联系方式 Telephones：400-996-2708

官方网站 Website：www.enjue.cc

迪威模型 3D Model：www.3dwhere.com/user/135269



微信公众号
WeChat Public



微信客服
WeChat Clientele Services

入驻平台 ENTRY PLATFORM

在线搜索“恩爵旗舰店”，线上下单实惠方便！

Search for “ENMG Flagship Store” online, ordering online is affordable and convenient !



天猫 Tmall



淘宝 Taobao




1688



京东 JD



拼多多 PDD



抖音 TikTok



速卖通 AliExpress